
GAM RUN 22-007: POST OAK SAVANNAH GROUNDWATER CONSERVATION DISTRICT MANAGEMENT PLAN

Shirley Wade, Ph.D., P.G.
Texas Water Development Board
Groundwater Division
Groundwater Modeling Department
(512) 936-0883
June 28, 2022



Shirley C. Wade
6/28/22

This page is intentionally blank

GAM RUN 22-007: POST OAK SAVANNAH GROUNDWATER CONSERVATION DISTRICT MANAGEMENT PLAN

Shirley Wade, Ph.D., P.G.
Texas Water Development Board
Groundwater Division
Groundwater Modeling Department
(512) 936-0883
June 28, 2022

EXECUTIVE SUMMARY:

Texas State Water Code, Section 36.1071, Subsection (h) (Texas Water Code, 2011), states that, in developing its groundwater management plan, a groundwater conservation district shall use groundwater availability modeling information provided by the Executive Administrator of the Texas Water Development Board (TWDB) in conjunction with any available site-specific information provided by the district for review and comment to the Executive Administrator.

The TWDB provides data and information to the Post Oak Savannah Groundwater Conservation District in two parts. Part 1 is the Estimated Historical Water Use/State Water Plan dataset report, which will be provided to you separately by the TWDB Groundwater Technical Assistance Department. Please direct questions about the water data report to Mr. Stephen Allen at 512-463-7317 or stephen.allen@twdb.texas.gov. Part 2 is the required groundwater availability modeling information, and this information includes:

1. the annual amount of recharge from precipitation, if any, to the groundwater resources within the district;
2. for each aquifer within the district, the annual volume of water that discharges from the aquifer to springs and any surface-water bodies, including lakes, streams, and rivers; and
3. the annual volume of flow into and out of the district within each aquifer and between aquifers in the district.

The groundwater management plan for the Post Oak Savannah Groundwater Conservation District should be adopted by the district on or before September 30, 2022 and submitted to the executive administrator of the TWDB on or before October 30, 2022. The current management plan for the Post Oak Savannah Groundwater Conservation District expires on December 29, 2022.

We used the groundwater availability models for the northern portion of the Trinity Aquifer and the Woodbine Aquifer (Kelley and others, 2014), the central portion of the Carrizo-Wilcox, Queen City, and Sparta aquifers (Young and others, 2018 and Young and Kushnereit, 2020), the Yegua-Jackson Aquifer (Deeds and others, 2010), and the Brazos River Alluvium Aquifer (Ewing and Jigmond, 2016) to estimate the groundwater management plan information for the Post Oak Savannah Groundwater Conservation District. This report replaces the results of GAM Run 16-015 (Ballew, 2017) because it includes results from the updated groundwater availability model for the central portion of the Carrizo-Wilcox, Queen City, and Sparta aquifers (Young and Kushnereit, 2020). Values may also differ from the previous report as a result of routine updates to the spatial grid files used to define county, groundwater conservation district, and aquifer boundaries, which can impact the calculated water budget values. Additionally, the approach used for analyzing model results is reviewed during each update and may have been refined to better delineate groundwater flows. This report also includes a new figure not included in the previous report to help groundwater conservation districts better visualize water budget components. Tables 1 through 6 summarize the groundwater availability model data required by statute and Figures 1, 3, 5, 7, 9, and 11 show the area of the models from which the values in Tables 1 through 6 were extracted. Figures 2, 4, 6, 8, 10, and 12 provide generalized diagrams of the groundwater flow components provided in Tables 1 through 6. If, after review of the figures, the Post Oak Savannah Groundwater Conservation District determines that the district boundaries used in the assessment do not reflect current conditions, please notify the TWDB at your earliest convenience.

METHODS:

In accordance with the provisions of the Texas State Water Code, Section 36.1071, Subsection (h), the groundwater availability models mentioned above were used to estimate information for the Post Oak Savannah Groundwater Conservation District management plan. Water budgets were extracted for the historical model periods for the Trinity Aquifer (1980 through 2012) and the Yegua-Jackson Aquifer (1980 through 1997) using ZONEBUDGET Version 3.01 (Harbaugh, 2009). Water budgets were extracted for the historical model periods for the Carrizo-Wilcox, Queen City, and Sparta aquifers (1980 through 2010) and the Brazos River Alluvium Aquifer (1980 through 2012) using

ZONEBUDGET USG Version 1.00 (Panday and others, 2015). The average annual water budget values for recharge, surface-water outflow, inflow to the district, outflow from the district, and the flow between aquifers within the district are summarized in this report.

PARAMETERS AND ASSUMPTIONS:

Trinity Aquifer

- We used version 2.01 of the groundwater availability model for the northern portion of the Trinity Aquifer and the Woodbine Aquifer. See Kelley and others (2014) for assumptions and limitations of the model.
- The groundwater availability model for the northern portion of the Trinity Aquifer and Woodbine Aquifer contains eight layers that generally represent the following: Layer 1 (the surficial outcrop area of the units in layers 2 through 8 and units younger than Woodbine Aquifer), Layer 2 (Woodbine Aquifer), Layer 3 (Washita and Fredericksburg Groups, and the Edwards [Balcones Fault Zone] Aquifer), and Layers 4 through 8 (Trinity Aquifer). Layers 2 through 7 also include pass-through cells. The Woodbine Aquifer does not occur within the Post Oak Savannah Groundwater Conservation District and therefore no groundwater budget values are included for it in this report.
- Perennial rivers and reservoirs were simulated using the MODFLOW River package. Ephemeral streams, flowing wells, springs, and evapotranspiration in riparian zones along perennial rivers were simulated using the MODFLOW Drain package.
- Water budget terms were averaged for the period 1980 through 2012 (stress periods 92 through 124)
- The model was run using MODFLOW-NWT (Niswonger and others, 2011).

Carrizo-Wilcox, Queen City, and Sparta aquifers

- We used version 3.02 of the groundwater availability model for the central portion of the Carrizo-Wilcox, Queen City, and Sparta aquifers. See Young and Kushnereit (2020) and Young and others (2018) for assumptions and limitations of the model.
- The groundwater availability model for the central portion of the Carrizo-Wilcox, Queen City, and Sparta aquifers contains ten layers that generally represent the

following: Layer 1 (Colorado River and Brazos River alluvium), Layer 2 (shallow flow system of all units in layers 3 through 10), Layer 3 (Sparta Aquifer and equivalent units), Layer 4 (Weches Formation), Layer 5 (Queen City Aquifer and equivalent units), Layer 6 (Reklaw Formation), and Layers 7 through 10 (Carrizo-Wilcox Aquifer and equivalent units).

- The MODFLOW River package was used to simulate groundwater exchange with major rivers and perennial streams. Outflow from ephemeral streams, intermittent streams, and seeps were simulated using the MODFLOW Drain package. The evapotranspiration package was used to simulate groundwater evapotranspiration from the model.
- Water budget terms were averaged for the period 1980 through 2010 (stress periods 52 through 82).
- The model was run with MODFLOW-USG (unstructured grid; Panday and others, 2015).

Yegua-Jackson Aquifer

- We used version 1.01 of the groundwater availability model for the Yegua-Jackson Aquifer. See Deeds and others (2010) for assumptions and limitations of the groundwater availability model.
- This groundwater availability model includes five layers, which all represent the Yegua-Jackson Aquifer in the outcrop. Outside the footprint of the Yegua-Jackson Aquifer the model layers represent the Catahoula Formation and other younger overlying units (Layer 1), the upper portion of the Jackson Group (Layer 2), the lower portion of the Jackson Group (Layer 3), the upper portion of the Yegua Group (Layer 4), and the lower portion of the Yegua Group (Layer 5).
- An overall water budget for the district was determined for the Yegua-Jackson Aquifer (Layer 1 through Layer 5, collectively, for the portions of the model that represent the Yegua-Jackson Aquifer).
- Water budget terms were averaged for the period 1980 through 1997 (stress periods 10 through 27).
- The model was run with MODFLOW-2000 (Harbaugh and others, 2000).

Brazos River Alluvium Aquifer

- We used version 1.01 of the groundwater availability model for the Brazos River Alluvium Aquifer. See Ewing and Jigmond (2016) for assumptions and limitations of the model.
- The groundwater availability model for the Brazos River Alluvium Aquifer contains three layers. Layers 1 and 2 represent the Brazos River Alluvium Aquifer and Layer 3 represents the surficial portions of the Carrizo-Wilcox, Queen City, Sparta, Yegua-Jackson, and Gulf Coast aquifers as well as various geologic units of the Cretaceous System, including the Edwards and Trinity.
- Perennial rivers and streams were simulated using the MODFLOW Streamflow-Routing package and ephemeral streams were simulated using the MODFLOW River package. Springs were simulated using the MODFLOW Drain package.
- Water budget terms were averaged for the period 1980 through 2012 (monthly stress periods 32 through 427).
- The model was run with MODFLOW-USG (unstructured grid; Panday and others, 2015).

RESULTS:

A groundwater budget summarizes the amount of water entering and leaving the aquifer according to the groundwater availability model. Selected groundwater budget components listed below were extracted from the groundwater availability models results for the Trinity, Carrizo-Wilcox, Queen City, Sparta, Yegua-Jackson, and Brazos River Alluvium aquifers located within the Post Oak Savannah Groundwater Conservation District and averaged over the historical calibration period, as shown in Tables 1 through 6.


1. Precipitation recharge—the areally distributed recharge sourced from precipitation falling on the outcrop areas of the aquifers (where the aquifer is exposed at land surface) within the district.
2. Surface-water outflow—the total water discharging from the aquifer (outflow) to surface-water features such as streams, reservoirs, and springs.
3. Flow into and out of district—the lateral flow within the aquifer between the district and adjacent counties.
4. Flow between aquifers—the net vertical flow between the aquifer and adjacent aquifers or confining units. This flow is controlled by the relative

water levels in each aquifer and aquifer properties of each aquifer or confining unit that define the amount of leakage that occurs.

The information needed for the district's management plan is summarized in Tables 1 through 6. It is important to note that sub-regional water budgets are not exact. This is due to the size of the model cells and the approach used to extract data from the model. To avoid double accounting, a model cell that straddles a political boundary, such as a district or county boundary, is assigned to one side of the boundary based on the location of the centroid of the model cell. For example, if a cell contains two counties, the cell is assigned to the county where the centroid of the cell is located.


TABLE 1: SUMMARIZED INFORMATION FOR THE TRINITY AQUIFER THAT IS NEEDED FOR THE POST OAK SAVANNAH GROUNDWATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Trinity Aquifer	0
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers.	Trinity Aquifer	0
Estimated annual volume of flow into the district within each aquifer in the district	Trinity Aquifer	738
Estimated annual volume of flow out of the district within each aquifer in the district	Trinity Aquifer	399
Estimated net annual volume of flow between each aquifer in the district	From the Trinity Aquifer to Trinity equivalent units	379
	To the Trinity Aquifer from underlying units	Not applicable ¹
¹ The model assumes a no-flow boundary at the base.		

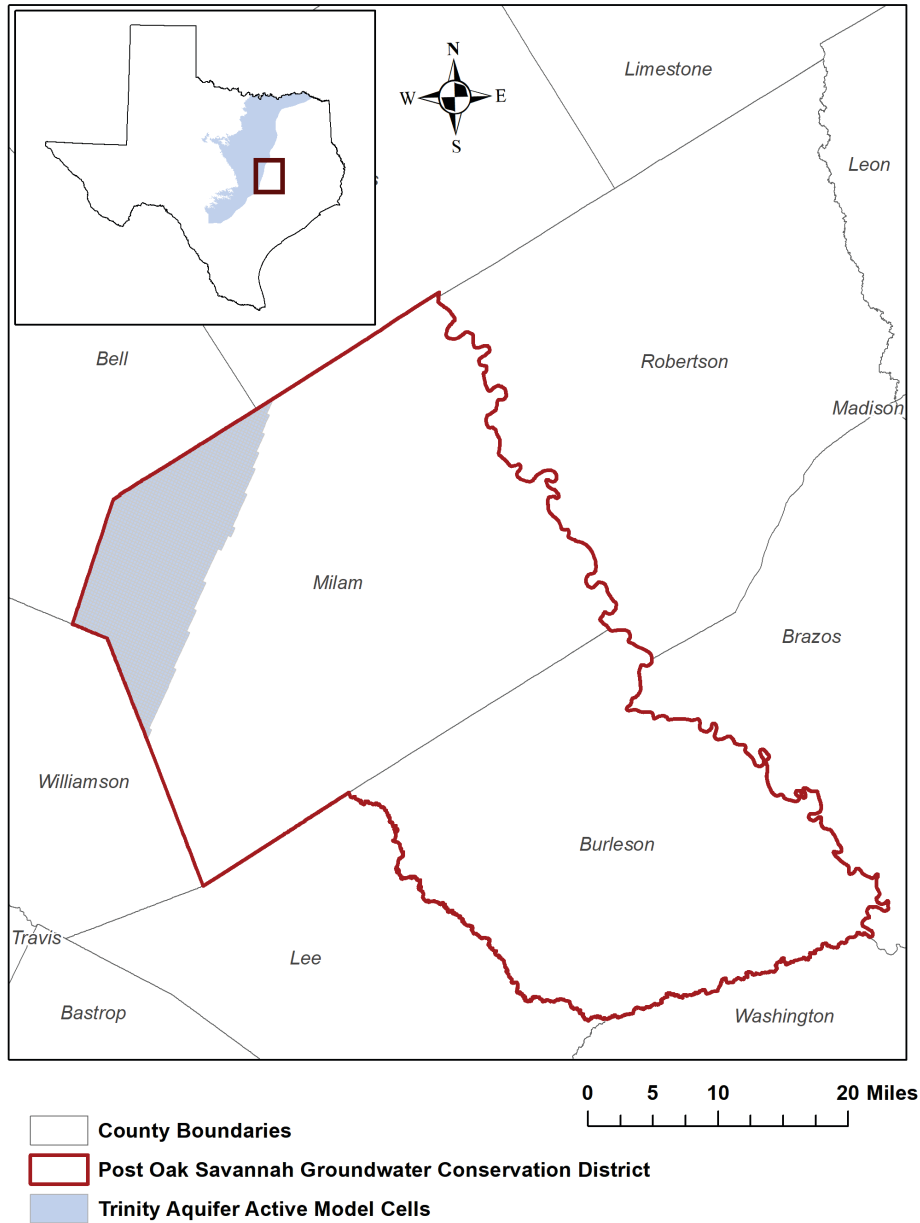

gcd boundaries date = 06.26.2020, county boundaries date = 07.03.2019, trnt_n grid date = 01.06.2020

FIGURE 1: AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE NORTHERN PORTION OF THE TRINITY AQUIFER FROM WHICH THE INFORMATION IN TABLE 1 WAS EXTRACTED (THE TRINITY AQUIFER EXTENT WITHIN THE DISTRICT BOUNDARY).

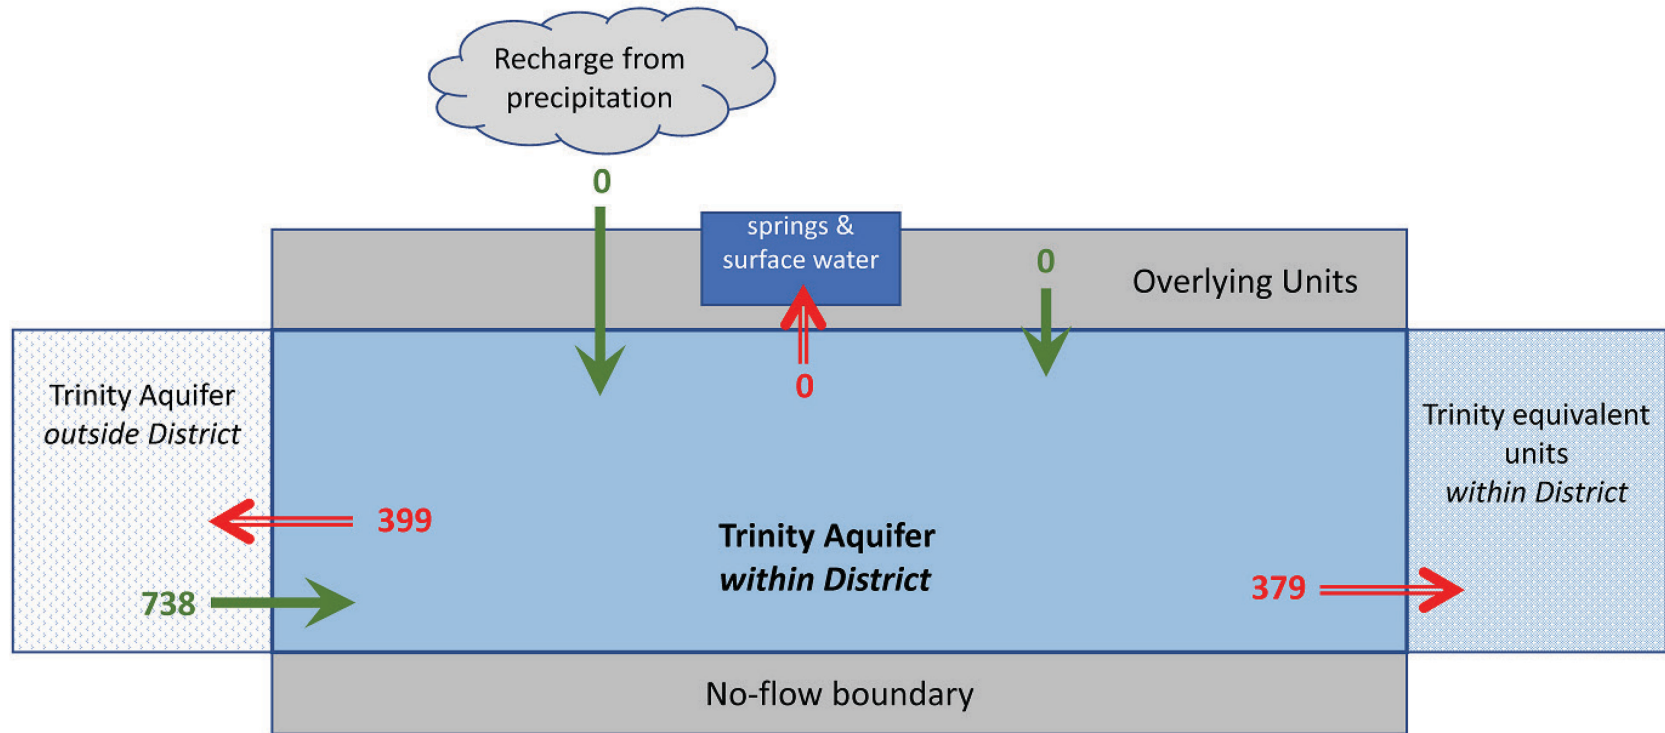


Caveat: This diagram only includes the water budget items provided in Table 1. A complete water budget would include additional inflows and outflows. If the District requires values for additional water budget items, please contact TWDB.

FIGURE 2: GENERALIZED DIAGRAM OF THE SUMMARIZED BUDGET INFORMATION FROM TABLE 1, REPRESENTING DIRECTIONS OF FLOW FOR THE TRINITY AQUIFER WITHIN THE POST OAK SAVANNAH GROUNDWATER WATER CONSERVATION DISTRICT. FLOW VALUES EXPRESSED IN ACRE-FEET PER YEAR (AFY).


TABLE 2: SUMMARIZED INFORMATION FOR THE CARRIZO-WILCOX AQUIFER THAT IS NEEDED FOR THE POST OAK SAVANNAH GROUNDWATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Carrizo-Wilcox Aquifer	39,740
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers.	Carrizo-Wilcox Aquifer	46,631
Estimated annual volume of flow into the district within each aquifer in the district	Carrizo-Wilcox Aquifer	13,664
Estimated annual volume of flow out of the district within each aquifer in the district	Carrizo-Wilcox Aquifer	25,054
Estimated net annual volume of flow between each aquifer in the district	From the Carrizo-Wilcox Aquifer to overlying alluvium	2,943
	To the Carrizo-Wilcox Aquifer from the Queen City Aquifer	989
	From the Carrizo-Wilcox Aquifer to the Reklaw confining unit	73
	From the Carrizo-Wilcox Aquifer to Carrizo-Wilcox equivalent units	196

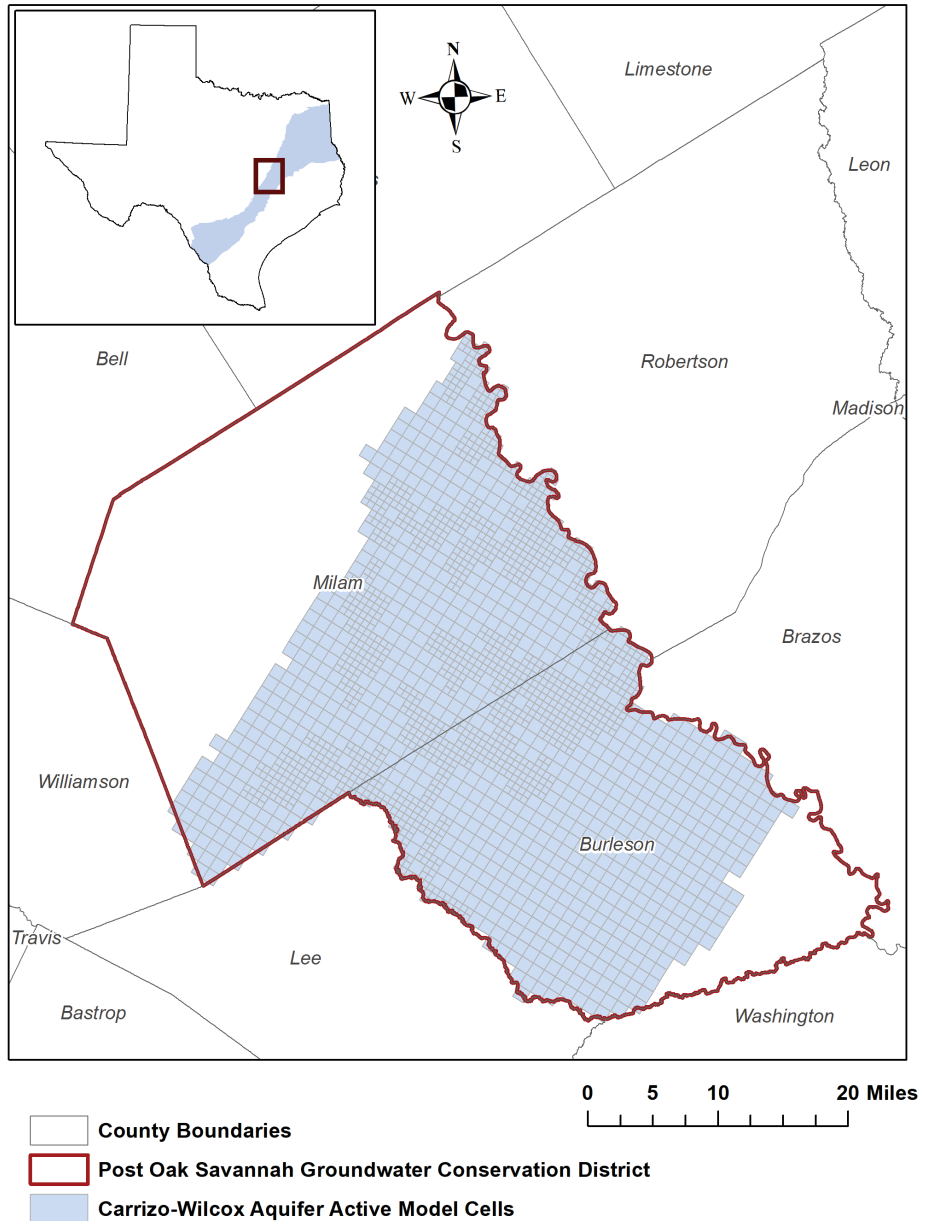

gcd boundaries date = 06.26.2020, county boundaries date = 07.03.2019, czwx_c_qcsp grid date = 03.28.2019

FIGURE 3: AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE CENTRAL PORTION OF THE CARRIZO-WILCOX, QUEEN CITY, AND SPARTA AQUIFERS FROM WHICH THE INFORMATION IN TABLE 2 WAS EXTRACTED (THE CARRIZO-WILCOX AQUIFER EXTENT WITHIN THE DISTRICT BOUNDARY).

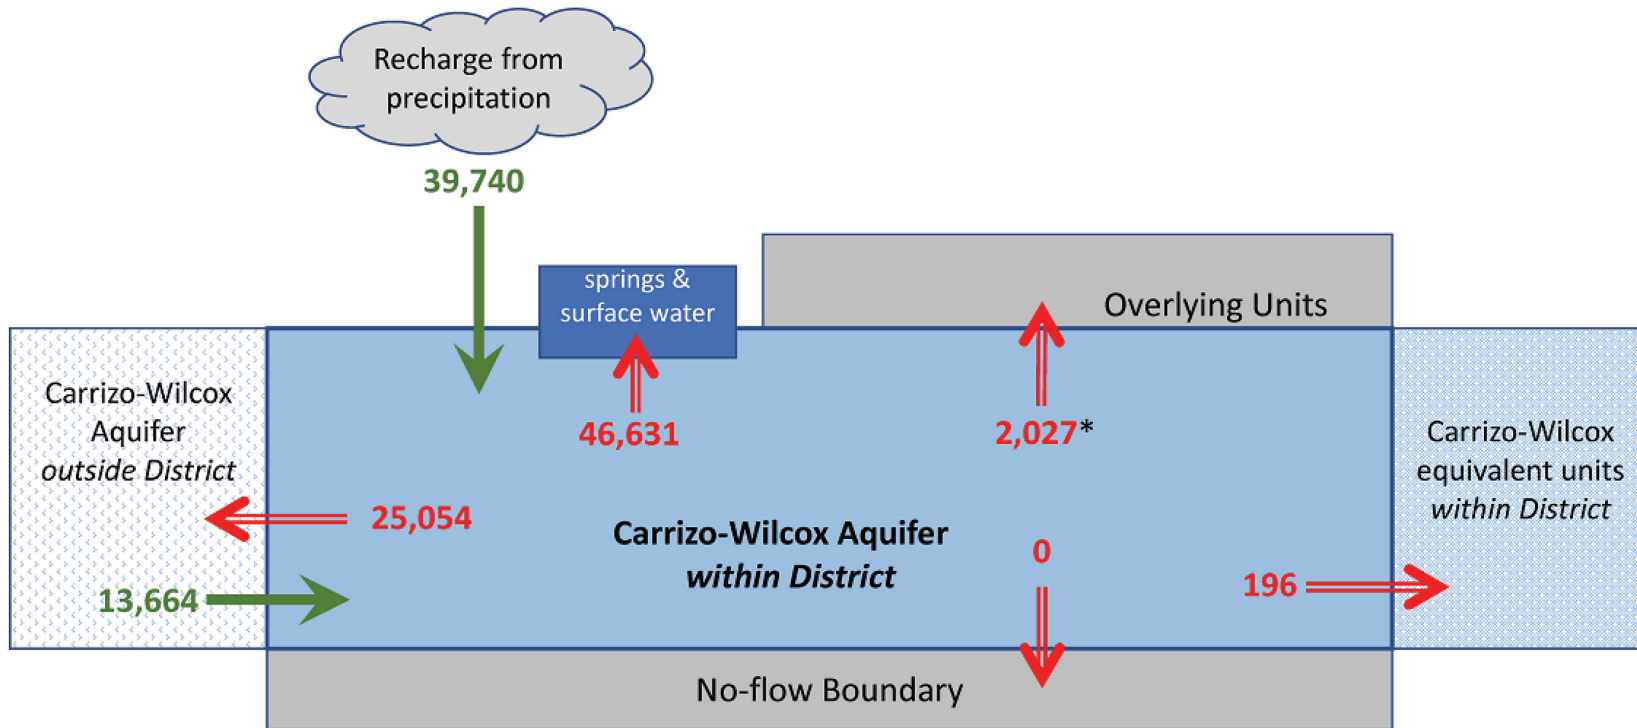


* Flow to overlying units includes net outflow of 2,943 acre-feet per year to river alluvium, net inflow of 989 acre-feet per year from the Queen City Aquifer, and net outflow of 73 acre-feet per year to the Reklaw confining unit.

Caveat: This diagram only includes the water budget items provided in Table 2. A complete water budget would include additional inflows and outflows. If the District requires values for additional water budget items, please contact TWDB.

FIGURE 4: GENERALIZED DIAGRAM OF THE SUMMARIZED BUDGET INFORMATION FROM TABLE 2, REPRESENTING DIRECTIONS OF FLOW FOR THE CARRIZO-WILCOX AQUIFER WITHIN THE POST OAK SAVANNAH GROUNDWATER CONSERVATION DISTRICT. FLOW VALUES EXPRESSED IN ACRE-FEET PER YEAR (AFY).


TABLE 3: SUMMARIZED INFORMATION FOR THE QUEEN CITY AQUIFER THAT IS NEEDED FOR THE POST OAK SAVANNAH GROUNDWATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Queen City Aquifer	12,342
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers.	Queen City Aquifer	41,292
Estimated annual volume of flow into the district within each aquifer in the district	Queen City Aquifer	1,307
Estimated annual volume of flow out of the district within each aquifer in the district	Queen City Aquifer	3,291
Estimated net annual volume of flow between each aquifer in the district	From the Queen City to overlying alluvium	2,209
	From the Queen City Aquifer to the Sparta Aquifer	912
	To the Queen City Aquifer from the Weches confining unit	2,098
	To the Queen City Aquifer from Queen City equivalent units	1
	To the Queen City Aquifer from the Reklaw confining unit	1,690
	From the Queen City Aquifer to the Carrizo-Wilcox Aquifer	989

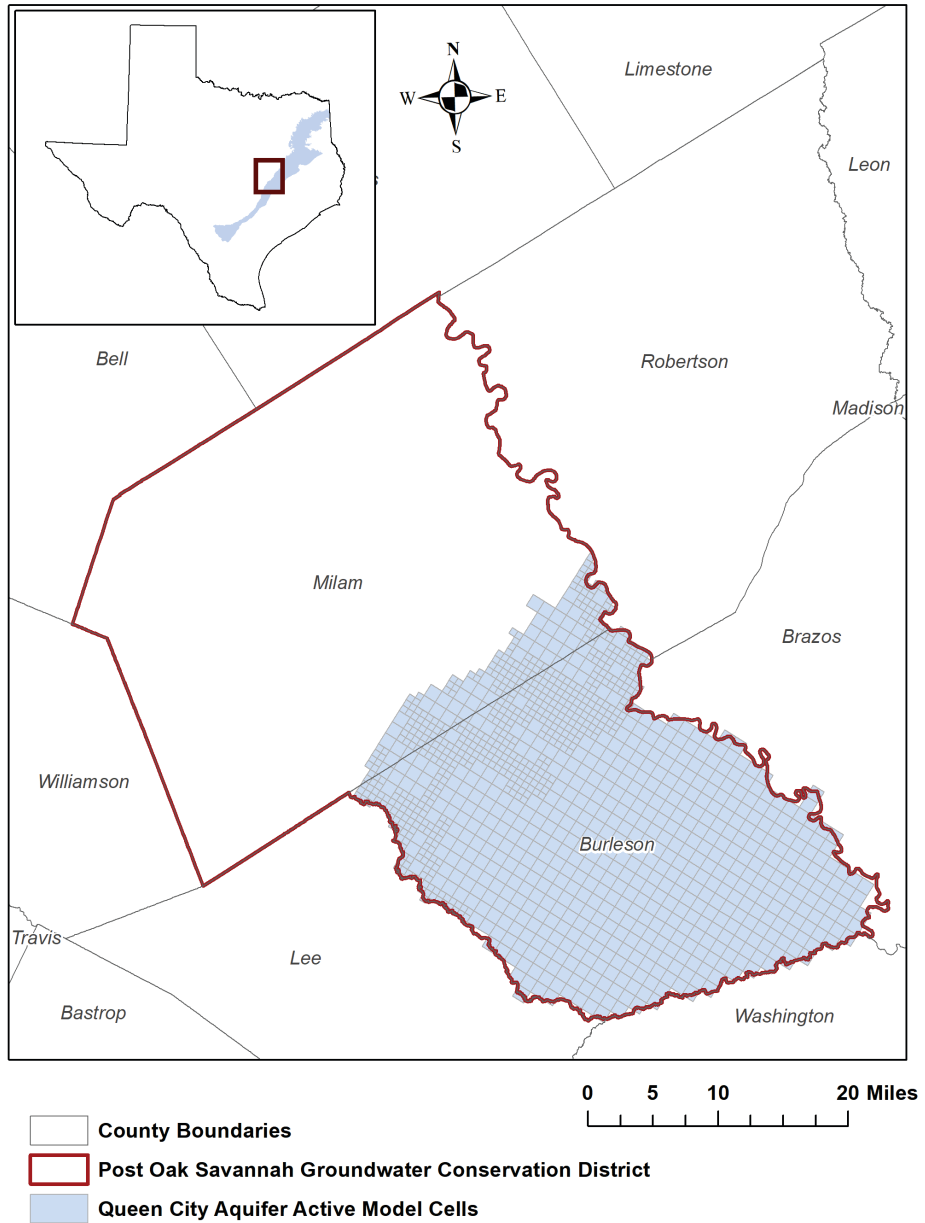

gcd boundaries date = 06.26.2020, county boundaries date = 07.03.2019, czwx_c_qcsp grid date = 03.28.2019

FIGURE 5: AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE CENTRAL PORTION OF THE CARRIZO-WILCOX, QUEEN CITY, AND SPARTA AQUIFERS FROM WHICH THE INFORMATION IN TABLE 3 WAS EXTRACTED (QUEEN CITY AQUIFER EXTENT WITHIN THE DISTRICT BOUNDARY).

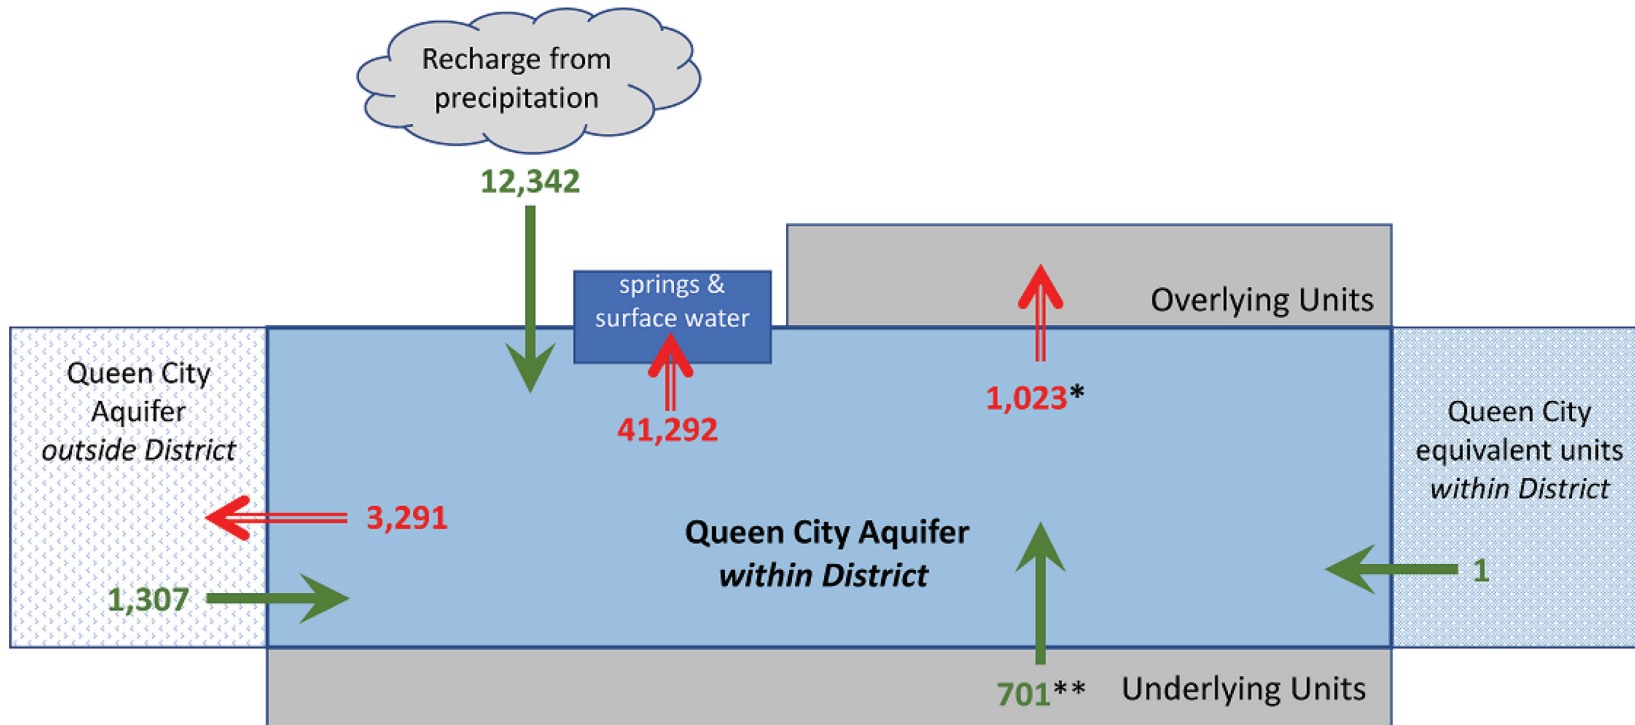

* Flow to overlying units includes net outflow of 2,209 acre-feet per year to river alluvium, net outflow of 912 acre-feet per year to the Sparta Aquifer and net inflow of 2,098 acre-feet per year from the Weches confining unit.


** Flow from underlying units includes net inflow of 1,690 acre-feet per year from the Reklaw confining unit and net outflow of 989 acre-feet per year to the Carrizo-Wilcox Aquifer.

Caveat: This diagram only includes the water budget items provided in Table 3. A complete water budget would include additional inflows and outflows. If the District requires values for additional water budget items, please contact TWDB.

FIGURE 6: GENERALIZED DIAGRAM OF THE SUMMARIZED BUDGET INFORMATION FROM TABLE 3, REPRESENTING DIRECTIONS OF FLOW FOR THE QUEEN CITY AQUIFER WITHIN THE POST OAK SAVANNAH GROUNDWATER CONSERVATION DISTRICT. FLOW VALUES EXPRESSED IN ACRE-FEET PER YEAR (AFY).


TABLE 4: SUMMARIZED INFORMATION FOR THE SPARTA AQUIFER THAT IS NEEDED FOR THE POST OAK SAVANNAH GROUNDWATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Sparta Aquifer	6,180
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers.	Sparta Aquifer	19,646
Estimated annual volume of flow into the district within each aquifer in the district	Sparta Aquifer	590
Estimated annual volume of flow out of the district within each aquifer in the district	Sparta Aquifer	968
Estimated net annual volume of flow between each aquifer in the district	From the Sparta Aquifer to overlying alluvium	2,230
	From the Sparta Aquifer to the Cook Mountain confining unit	808
	To the Sparta Aquifer from Sparta equivalent units	52
	From the Sparta Aquifer to the Weches confining unit	751
	To the Sparta Aquifer from the Queen City Aquifer	912

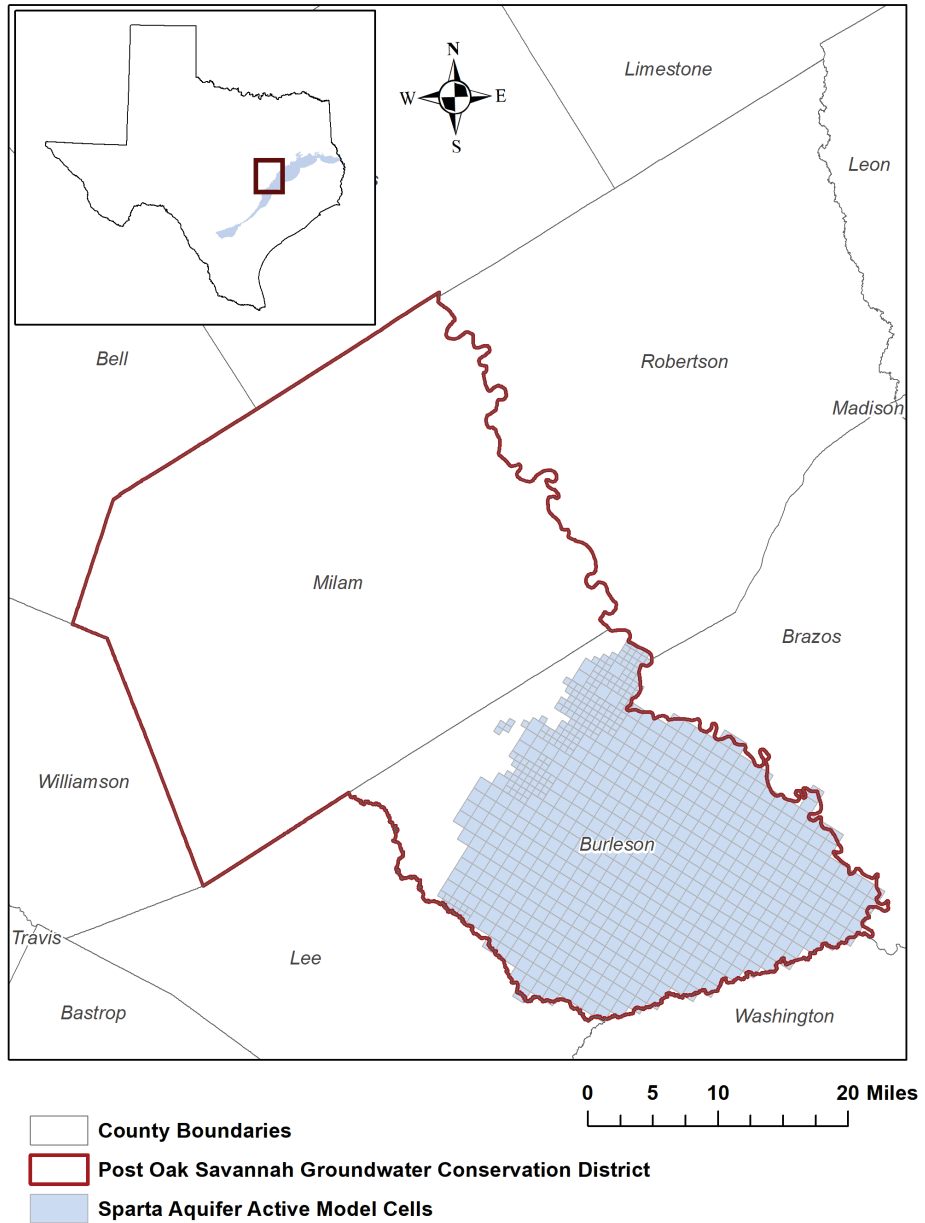

gcd boundaries date = 06.26.2020, county boundaries date = 07.03.2019, czwx_c_qcsp grid date = 03.28.2019

FIGURE 7: AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE CENTRAL PORTION OF THE CARRIZO-WILCOX, QUEEN CITY, AND SPARTA AQUIFERS FROM WHICH THE INFORMATION IN TABLE 4 WAS EXTRACTED (SPARTA AQUIFER EXTENT WITHIN THE DISTRICT BOUNDARY).

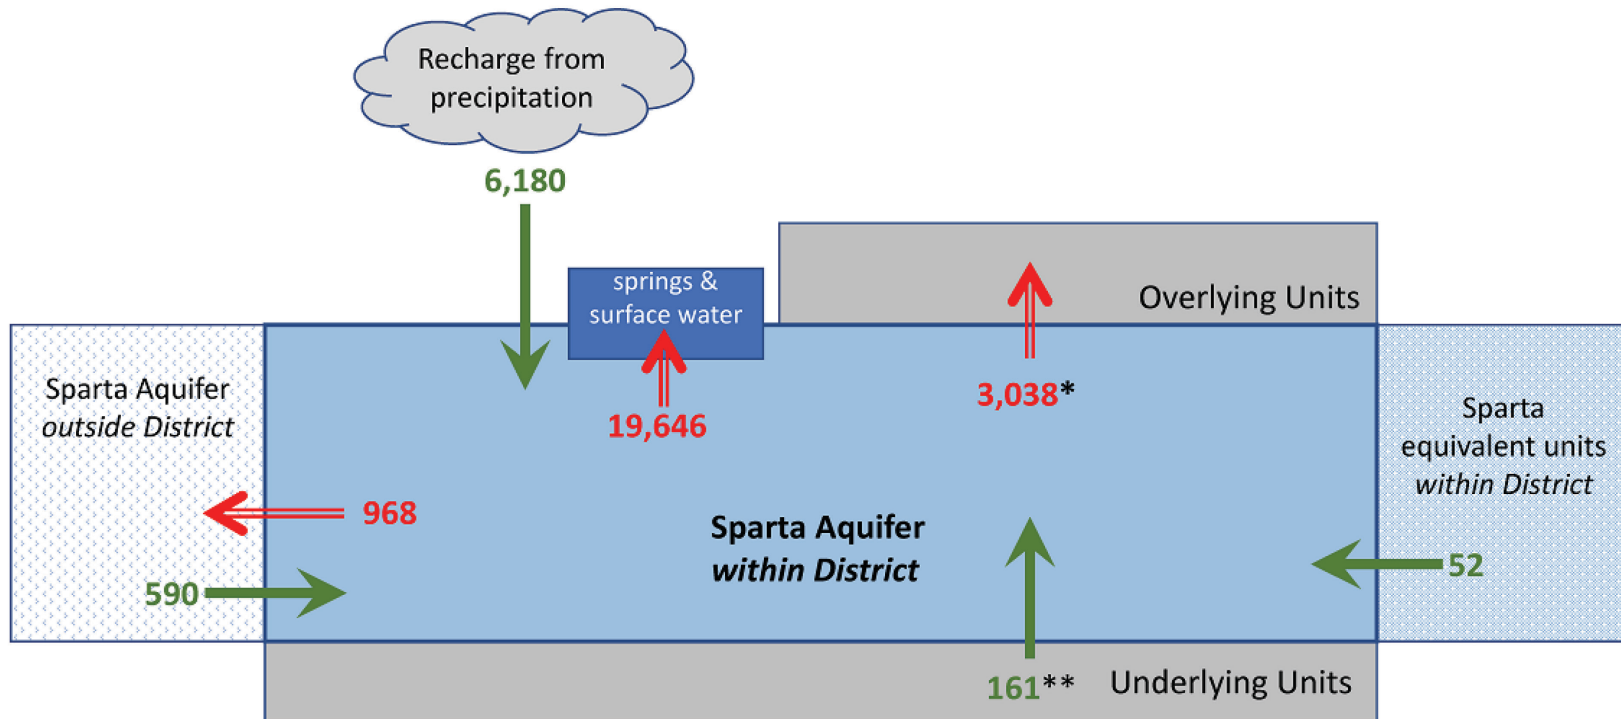

* Flow to overlying units includes net outflow of 2,230 acre-feet per year to river alluvium and net outflow of 808 acre-feet per year to the Cook Mountain confining unit.


** Flow from underlying units includes net outflow of 751 acre-feet per year to the Weches confining unit and net inflow of 912 acre-feet per year from the Queen City Aquifer.

Caveat: This diagram only includes the water budget items provided in Table 4. A complete water budget would include additional inflows and outflows. If the District requires values for additional water budget items, please contact TWDB.

FIGURE 8: GENERALIZED DIAGRAM OF THE SUMMARIZED BUDGET INFORMATION FROM TABLE 4, REPRESENTING DIRECTIONS OF FLOW FOR THE SPARTA AQUIFER WITHIN THE POST OAK SAVANNAH GROUNDWATER CONSERVATION DISTRICT. FLOW VALUES EXPRESSED IN ACRE-FEET PER YEAR (AFY).


TABLE 5: SUMMARIZED INFORMATION FOR THE YEGUA-JACKSON AQUIFER THAT IS NEEDED FOR THE POST OAK SAVANNAH GROUNDWATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Yegua-Jackson Aquifer	22,416
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers.	Yegua-Jackson Aquifer	12,860
Estimated annual volume of flow into the district within each aquifer in the district	Yegua-Jackson Aquifer	3,922
Estimated annual volume of flow out of the district within each aquifer in the district	Yegua-Jackson Aquifer	8,624
Estimated net annual volume of flow between each aquifer in the district	To Yegua-Jackson Aquifer from younger units	69
	To the Yegua-Jackson Aquifer from Yegua-Jackson equivalent units	56
	To the Yegua-Jackson Aquifer from underlying units	Not applicable ¹
¹ The model assumes a no-flow boundary at the base.		

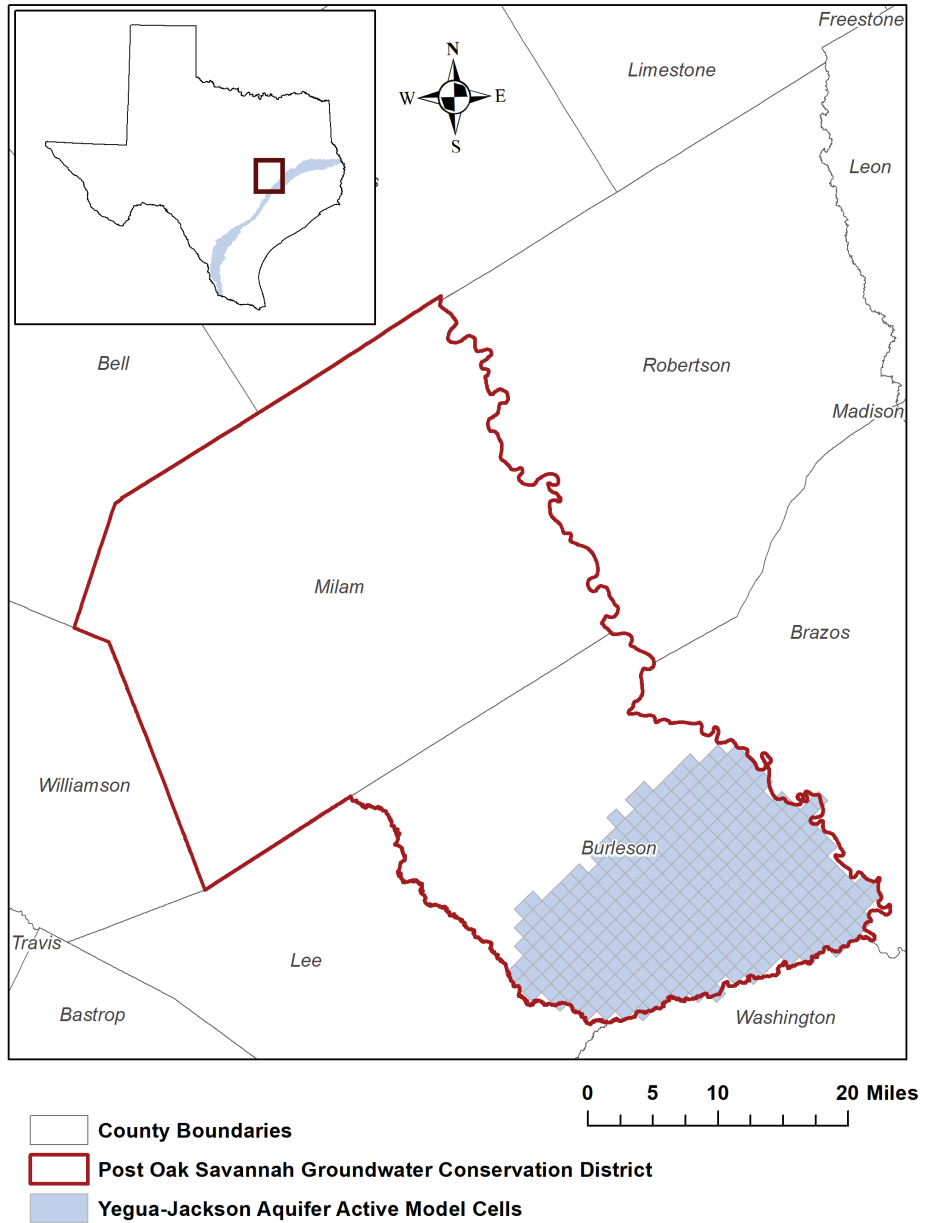

gcd boundaries date = 06.26.2020, county boundaries date = 07.03.2019, ygjk grid date = 07.09.2020

FIGURE 9: AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE YEGUA-JACKSON AQUIFER FROM WHICH THE INFORMATION IN TABLE 5 WAS EXTRACTED (YEGUA-JACKSON AQUIFER EXTENT WITHIN THE DISTRICT BOUNDARY).

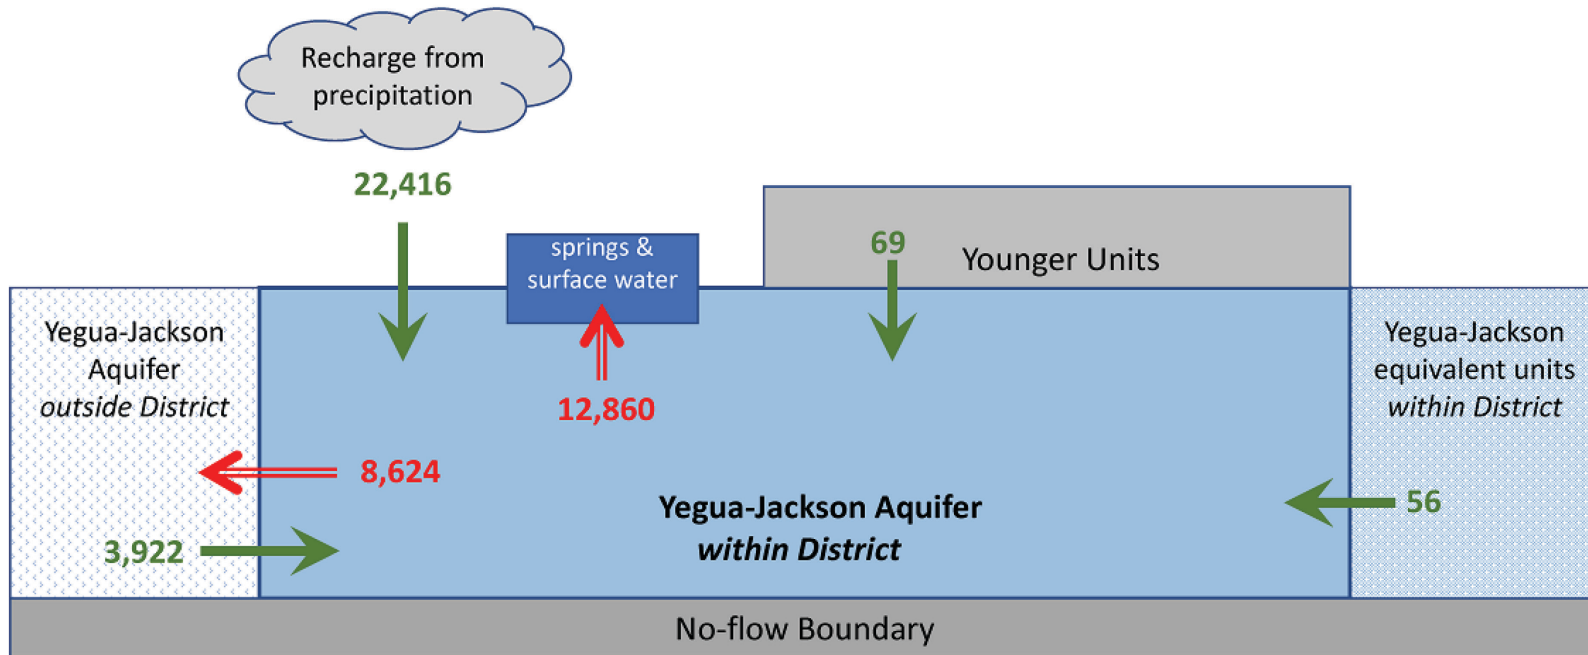


Caveat: This diagram only includes the water budget items provided in Table 5. A complete water budget would include additional inflows and outflows. If the District requires values for additional water budget items, please contact TWDB.

FIGURE 10: GENERALIZED DIAGRAM OF THE SUMMARIZED BUDGET INFORMATION FROM TABLE 5, REPRESENTING DIRECTIONS OF FLOW FOR THE YEGUA-JACKSON AQUIFER WITHIN THE POST OAK SAVANNAH GROUNDWATER CONSERVATION DISTRICT. FLOW VALUES EXPRESSED IN ACRE-FEET PER YEAR (AFY).


TABLE 6: SUMMARIZED INFORMATION FOR THE BRAZOS RIVER ALLUVIUM AQUIFER THAT IS NEEDED FOR THE POST OAK SAVANNAH GROUNDWATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Brazos River Alluvium Aquifer	15,433
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers.	Brazos River Alluvium Aquifer	25,412
Estimated annual volume of flow into the district within each aquifer in the district	Brazos River Alluvium Aquifer	16,937
Estimated annual volume of flow out of the district within each aquifer in the district	Brazos River Alluvium Aquifer	20,194
Estimated net annual volume of flow between each aquifer in the district	To the Brazos River Alluvium Aquifer from the Yegua-Jackson Aquifer	2,802
	To the Brazos River Alluvium Aquifer from the Sparta Aquifer	3,760
	To the Brazos River Alluvium Aquifer from the Queen City Aquifer	1,669
	To the Brazos River Alluvium Aquifer from the Carrizo-Wilcox Aquifer	645
	To the Brazos River Alluvium Aquifer from confining units	504

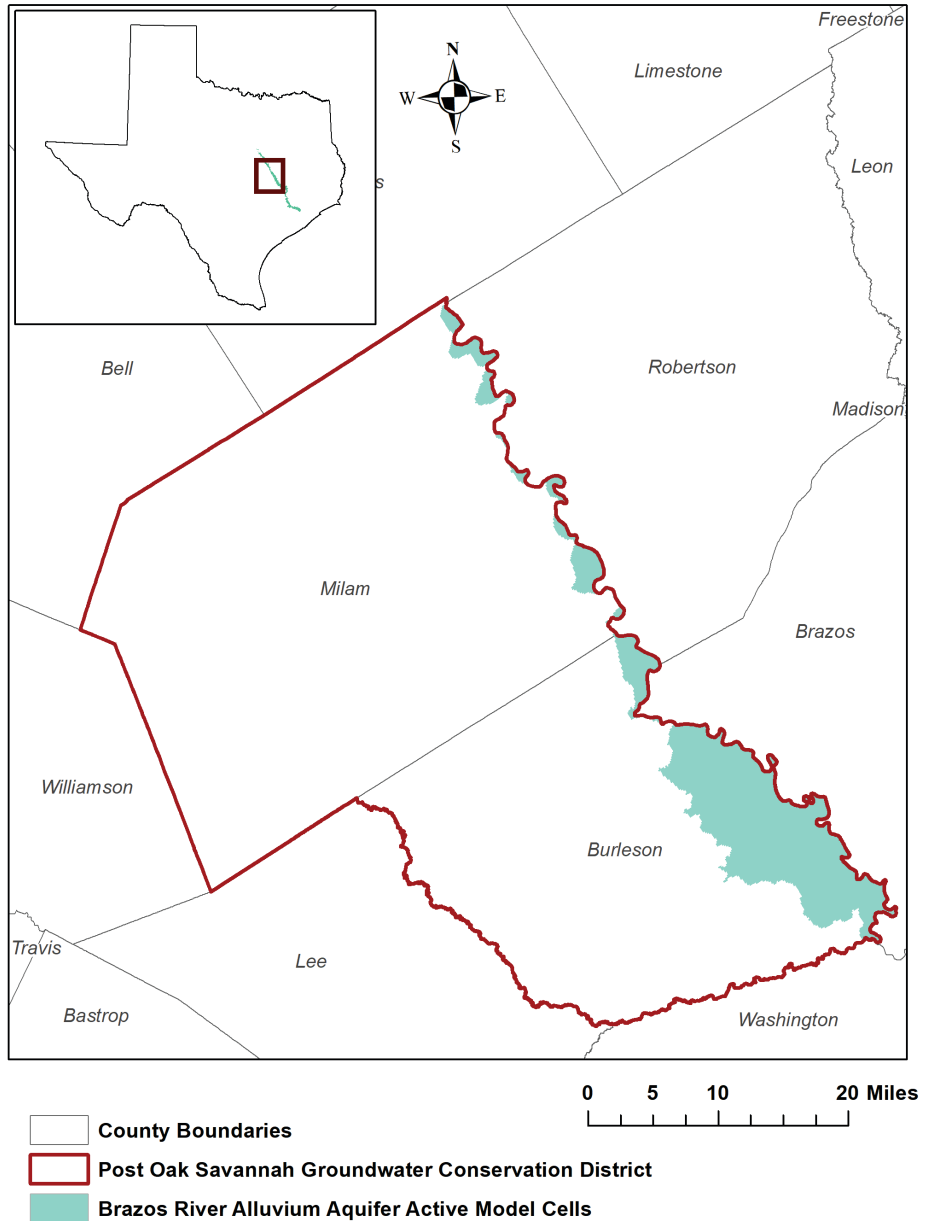

gcd boundaries date = 06.26.2020, county boundaries date = 07.03.201, braa grid date = 07.10.2020

FIGURE 11: AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE BRAZOS RIVER ALLUVIUM AQUIFER FROM WHICH THE INFORMATION IN TABLE 6 WAS EXTRACTED (BRAZOS RIVER ALLUVIUM AQUIFER EXTENT WITHIN THE DISTRICT BOUNDARY).

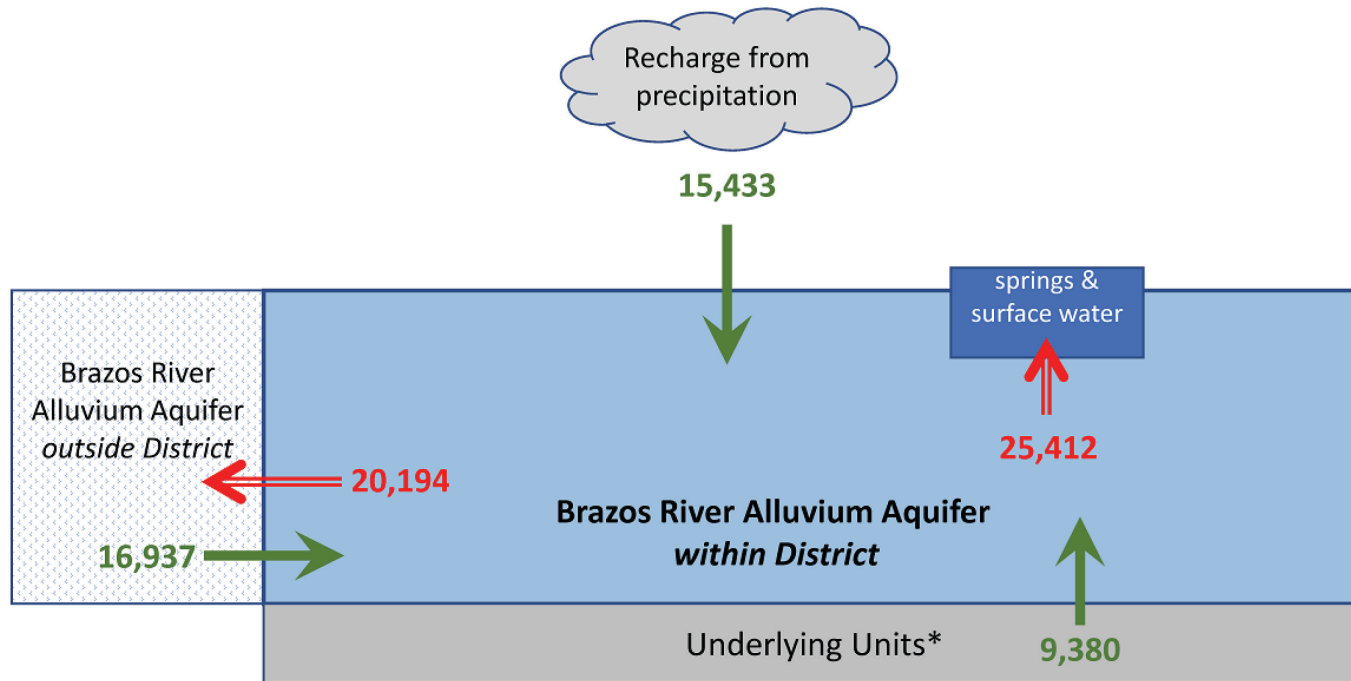

* Flow from underlying units includes net inflows of 2,802 acre-feet per year from the Yegua-Jackson Aquifer, 3,760 acre-feet per year from the Sparta Aquifer, 1,669 acre-feet per year from the Queen City Aquifer, 645 acre-feet per year from the Carrizo-Wilcox Aquifer and 504 acre-feet per year from confining units.

Caveat: This diagram only includes the water budget items provided in Table 6. A complete water budget would include additional inflows and outflows. If the District requires values for additional water budget items, please contact TWDB.

FIGURE 12: GENERALIZED DIAGRAM OF THE SUMMARIZED BUDGET INFORMATION FROM TABLE 6, REPRESENTING DIRECTIONS OF FLOW FOR THE BRAZOS RIVER ALLUVIUM AQUIFER WITHIN THE POST OAK SAVANNAH GROUNDWATER CONSERVATION DISTRICT. FLOW VALUES EXPRESSED IN ACRE-FEET PER YEAR (AFY).

LIMITATIONS:

The groundwater models used in completing this analysis are the best available scientific tools that can be used to meet the stated objectives. To the extent that this analysis will be used for planning purposes and/or regulatory purposes related to pumping in the past and into the future, it is important to recognize the assumptions and limitations associated with the use of the results. In reviewing the use of models in environmental regulatory decision making, the National Research Council (2007) noted:

“Models will always be constrained by computational limitations, assumptions, and knowledge gaps. They can best be viewed as tools to help inform decisions rather than as machines to generate truth or make decisions. Scientific advances will never make it possible to build a perfect model that accounts for every aspect of reality or to prove that a given model is correct in all respects for a particular regulatory application. These characteristics make evaluation of a regulatory model more complex than solely a comparison of measurement data with model results.”

A key aspect of using the groundwater model to evaluate historic groundwater flow conditions includes the assumptions about the location in the aquifer where historic pumping was placed. Understanding the amount and location of historical pumping is as important as evaluating the volume of groundwater flow into and out of the district, between aquifers within the district (as applicable), interactions with surface water (as applicable), recharge to the aquifer system (as applicable), and other metrics that describe the impacts of that pumping. In addition, assumptions regarding precipitation, recharge, and interaction with streams are specific to particular historic time periods.

Because the application of the groundwater models was designed to address regional scale questions, the results are most effective on a regional scale. The TWDB makes no warranties or representations related to the actual conditions of any aquifer at a particular location or at a particular time.

It is important for groundwater conservation districts to monitor groundwater pumping and overall conditions of the aquifer. Because of the limitations of the groundwater model and the assumptions in this analysis, it is important that the groundwater conservation districts work with the TWDB to refine this analysis in the future given the reality of how the aquifer responds to the actual amount and location of pumping now and in the future. Historic precipitation patterns also need to be placed in context as future climatic conditions, such as dry and wet year precipitation patterns, may differ and affect groundwater flow conditions.

REFERENCES:

- Ballew, N., 2017, GAM Run 16-015: Texas Water Development Board, GAM Run 16-015 Report, 22 p., <http://www.twdb.texas.gov/groundwater/docs/GAMruns/GR16-015.pdf>
- Deeds, N. E., Yan, T., Singh, A., Jones, T. L., Kelley, V. A., Knox, P. R., and Young, S. C., 2010, Groundwater availability model for the Yegua-Jackson Aquifer: Final report prepared for the Texas Water Development Board by INTERA, Inc., 582 p., http://www.twdb.texas.gov/groundwater/models/gam/ygjk/YGJK_Model_Report.pdf.
- Ewing, J.E., and Jigmond, M., 2016, Final Numerical Model Report for the Brazos River Alluvium Aquifer Groundwater Availability Model: Contract report to the Texas Water Development Board, 357 p., http://www.twdb.texas.gov/groundwater/models/gam/bzrv/BRAA_NM_REPORT_FINAL.pdf?d=1502891797831
- Harbaugh, A. W., Banta, E. R., Hill, M. C., and McDonald, M. G., 2000, MODFLOW-2000, the U.S. Geological Survey modular ground-water model -- User guide to modularization concepts and the Ground-Water Flow Process: U.S. Geological Survey Open-File Report 00-92, 121 p.
- Harbaugh, A. W., 2009, Zonebudget Version 3.01, A computer program for computing subregional water budgets for MODFLOW ground-water flow models, U.S. Geological Survey Groundwater Software.
- Kelley, V.A., Ewing, J., Jones, T.L., Young, S.C., Deeds, N., and Hamlin, S., 2014, Updated Groundwater Availability Model of the Northern Trinity and Woodbine Aquifers – Final Model Report, 984 p., http://www.twdb.texas.gov/groundwater/models/gam/trnt n/Final NTGAM Vol%20I%20Aug%202014_Report.pdf
- National Research Council, 2007, Models in Environmental Regulatory Decision Making Committee on Models in the Regulatory Decision Process, National Academies Press, Washington D.C., 287 p., http://www.nap.edu/catalog.php?record_id=11972.
- Niswonger, R.G., Panday, S., and Ibaraki, M., 2011, MODFLOW-NWT, a Newton formulation for MODFLOW-2005: USGS, Techniques and Methods 6-A37, 44 p.
- Panday, S., Langevin, C.D., Niswonger, R.G., Ibaraki, M., and Hughes, J.D., 2015, MODFLOW-USG version 1.3.00: An unstructured grid version of MODFLOW for simulating groundwater flow and tightly coupled processes using a control volume finite-difference formulation: U.S. Geological Survey Software Release, 01 December 2015, 66p., <http://dx.doi.org/10.5066/F7R20ZFI>

Texas Water Code, 2011, <http://www.statutes.legis.state.tx.us/docs/WA/pdf/WA.36.pdf>

Young, S., Jigmond, M., Jones, T., Ewing, T., Panday, S., Harden, R. W, and Lupton, D., 2018, Final Report: Groundwater Availability Model for the Central Portion of the Sparta, Queen City, and Carrizo-Wilcox Aquifers, 942 p.,
[https://www.twdb.texas.gov/groundwater/models/gam/hpas/HPAS GAM Conceptual Report.pdf](https://www.twdb.texas.gov/groundwater/models/gam/hpas/HPAS_GAM_Conceptual_Report.pdf)

Young, S.C., and Kushnereit, R., 2020, GMA 12 Update to the Groundwater Availability Model for the Central Portion of the Sparta, Queen City, and Carrizo-Wilcox Aquifers, Update to Improve Representation of the Transmissive Properties of the Simsboro Aquifer in the Vicinity of the Vista Ridge Well Field, 39 p.,
[http://www.twdb.texas.gov/groundwater/models/gam/czwx c/PE Report GMA12 final october 2020 merge.pdf](http://www.twdb.texas.gov/groundwater/models/gam/czwx_c/PE_Report_GMA12_final_october_2020_merge.pdf)